

Reefton Column



ibex



Reefton Column

General Specification

Finish	Advanced Duplex Paint System - Hot Dip Galvanised + Epoxy Paint
Life	50 Year Design Life *
Dimensions	Column Heights - 7.6m Standard (Other heights available on request) Outreach - Single, Double, Triple, Quad
Material	Cold Formed Steel Construction
Treatment	Hot Dip Galvanized 55 UM Nominal Thickness
Safety Rating	LE Traffic Safety Rating
Standards	NZS 3404, AS/NZS 1170, AS/NZS 1554, AS/NZS 2312, AS/NZS 3678, AS/NZS 4600, AS/NZS4676, AS/NZS 4680


Colours
Other colours available on request



Gloss Black

Galvanised Steel

Mounting

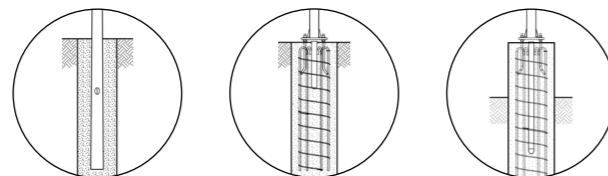

In Ground

Flange Base

Plinth Base

* It is recommended that a site specific assessment is carried out on each project with consideration given to the location / wind ratings / loads / topography / luminaire sail area.


Please contact our engineering team for any assistance.

Produce statement available on request.



Visit ibexlighting.com for further information

Size Chart

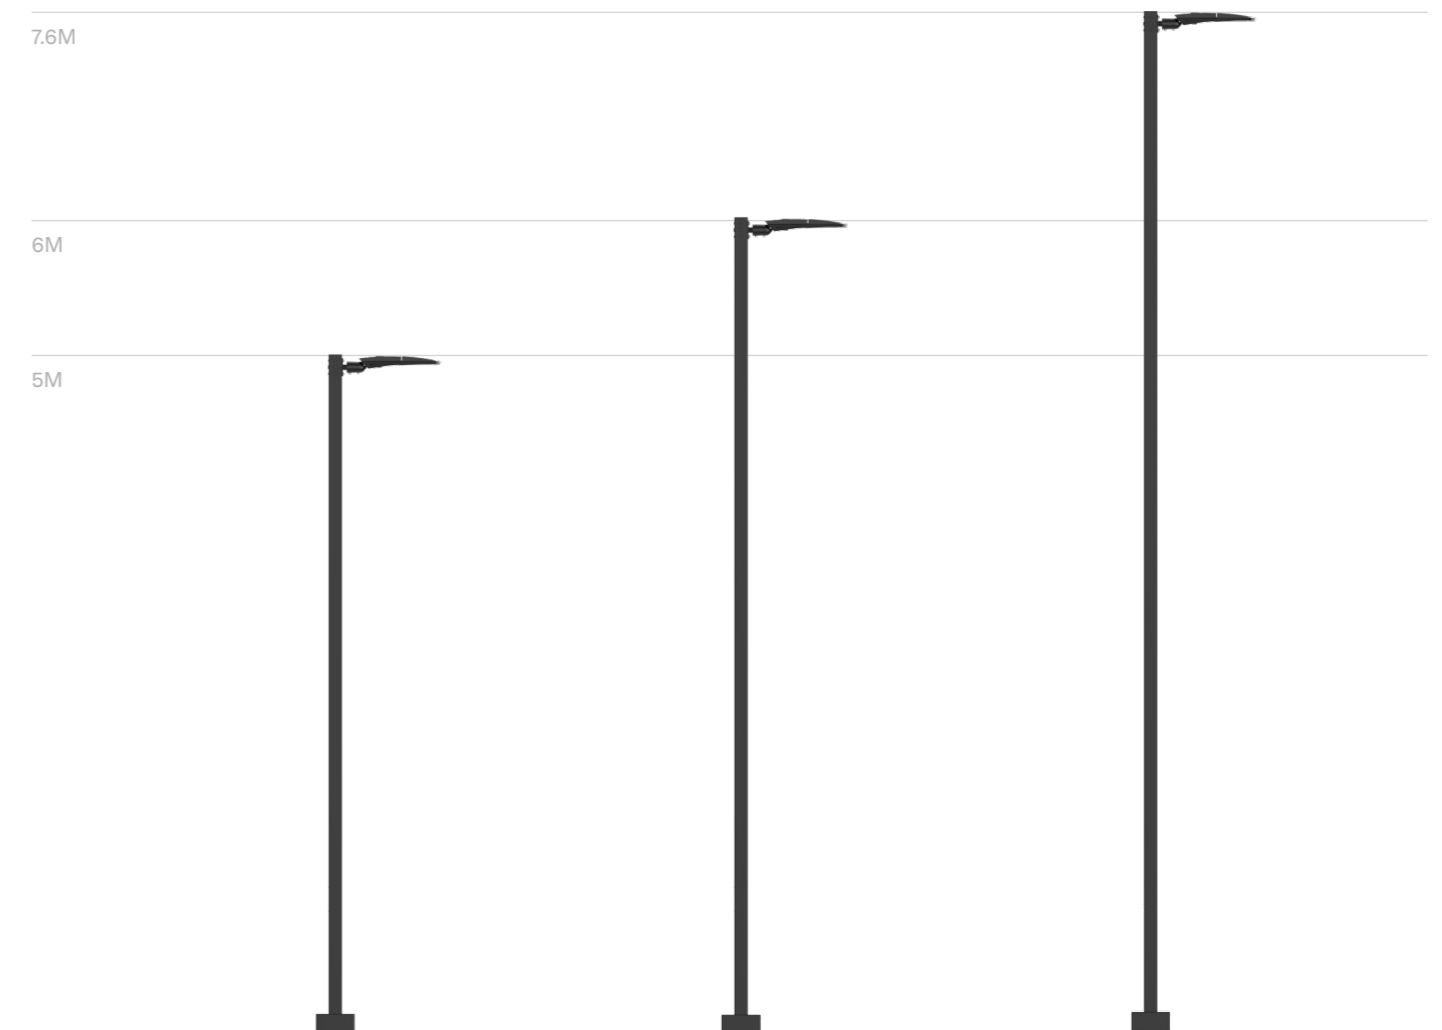

* Standard sizes. Custom sizes available on request
* Single and double arm configurations available



5

Reefton Column



6

Ibex Lighting

ibex

Auckland
Level 1, 40 Onehunga Mall
Onehunga Auckland 1061
P | 09 915 1083

Tauranga
2 Matarawa Place, Tauriko
Tauranga 3171
P | 07 927 7700